
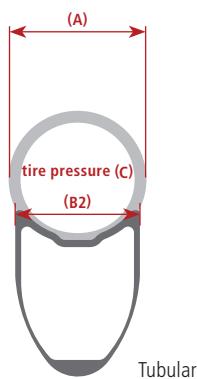


DT SWISS TIRE PRESSURE / TIRE DIMENSION

Tire width (A)		Rim inner width Clincher (B1)							Rim outer width Tubular (B2)			Max. tire pressure (C*)		
[mm]	[inch]	15 – 17.9 mm	18 – 19.9 mm	20 – 22.4 mm	22.5 – 24.4 mm	24.5 – 27.5 mm	27.6 – 39.4 mm	39.5 – 50 mm	50.1 – 80 mm	21 mm	25 mm	26 mm	[bar]	[psi]
20	0.80	●								●	●	●	9.5	138
23	0.90	●	●							●	●	●	9.0	131
25	1.00	●	●							●	●	●	8.5	123
28	1.10	●	●	●						●	●	●	7.8	113
30	1.20	●	●	●						●	●		7.2	104
32	1.25	●	●	●						●	●		6.8	99
35	1.35	●	●	●	●					●	●		6.0	87
37	1.40		●	●	●						●		5.7	83
40	1.50		●	●	●	●					●		5.5	80
42	1.60		●	●	●	●					●		5.2	75
44	1.70		●	●	●	●					●		5.0	73
47	1.85		●	●	●	●	●				●		4.7	68
50	1.95		●	●	●	●	●				●		4.4	64
52	2.05		●	●	●	●	●				●		4.1	59
54	2.10		●	●	●	●	●				●		3.8	55
57	2.20		●	●	●	●	●				●		3.5	51
60	2.35		●	●	●	●	●	●					3.2	46
62	2.50			●	●	●	●	●	●				2.9	42
65	2.60				●	●	●	●	●				2.7	39
68	2.70					●	●	●	●				2.5	36
71	2.80						●	●	●				2.3	33
74	2.90							●	●	●			2.1	30
76	3.00								●	●			2.0	29
81	3.20									●	●		2.0	29
89	3.50									●	●		2.0	29
102	4.00									●	●		2.0	29
107	4.20									●	●		2.0	29
114	4.50										●		2.0	29
122	4.80										●		2.0	29
127	5.00										●		2.0	29

● compatible

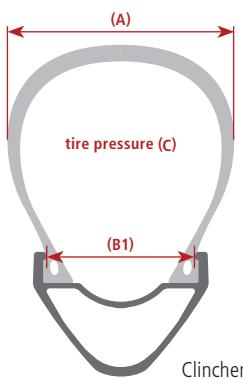

- (A) Refer to technical information on tires.
For example: road: 622 x 23 // mtb: 29 x 2.35
- (B) Refer to technical information on DT Swiss rims.
For example: 622 x 20
- (C) For conventional tire systems (tubetype, tubeless ready and tubeless).
The tire pressure must stay within the tire manufacturers specified pressure but never exceed the max. tire pressure specified by DT Swiss. Other systems are not approved by DT Swiss.