



ebikemotion X35



#6



 EN · Motor sensor signal error

 ES · Señal sensor de motor errónea



 DE · Falsches Motorsensorsignal

 FR · Signal capteur du moteur erroné

 IT · Segnale del sensore del motore erróneo

 PT · Sinal sensor de motor errado

Problem / Problema / Problem / Problème / Problema / Problema

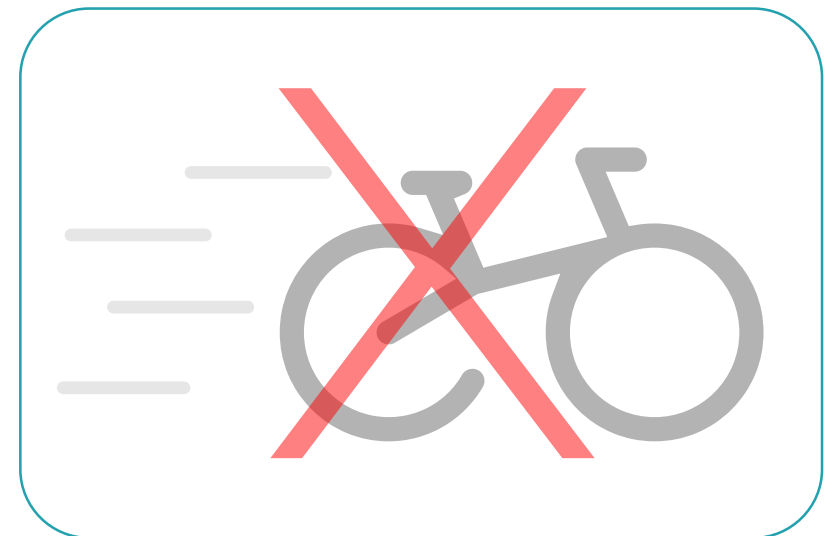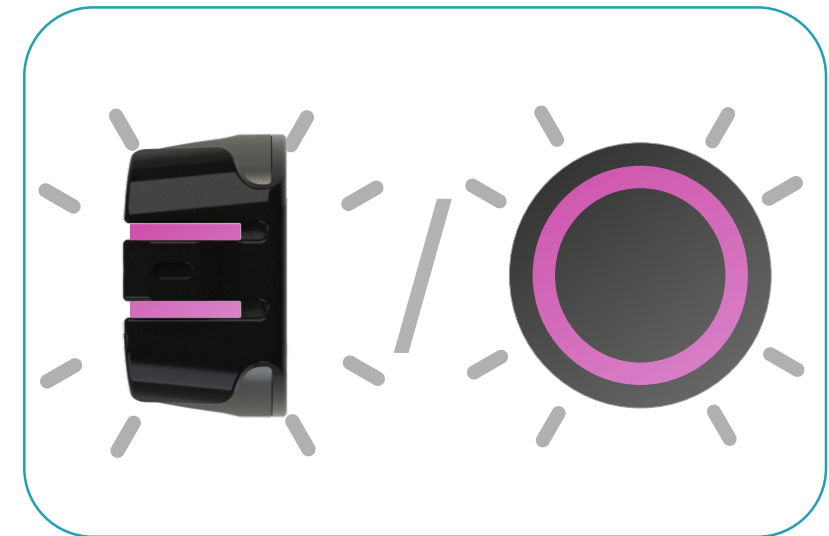



#6

EN

1. Check the condition of the motor cable.
2. Check that the connector pins are not damaged or misaligned.

ES

1. Comprobar el estado del cable del motor.
2. Comprobar que los pines del conector no están dañados ni desalineados.

DE

1. Zustand des Motorkabels überprüfen.
2. Steckerstifte auf Beschädigung und falsche Richtung überprüfen.

FR




1. Vérifier l'état du câble du moteur.
2. S'assurer que les broches du connecteur ne sont ni endommagées ni mal alignées.

IT

1. Verificare lo stato del cavo del motore.
2. Verificare che i pin del connettore non siano danneggiati o disallineati.

PT

1. Comprovar o estado do cabo do motor.
2. Comprovar que os pinos do conector não se encontram danificados ou desalinhados.

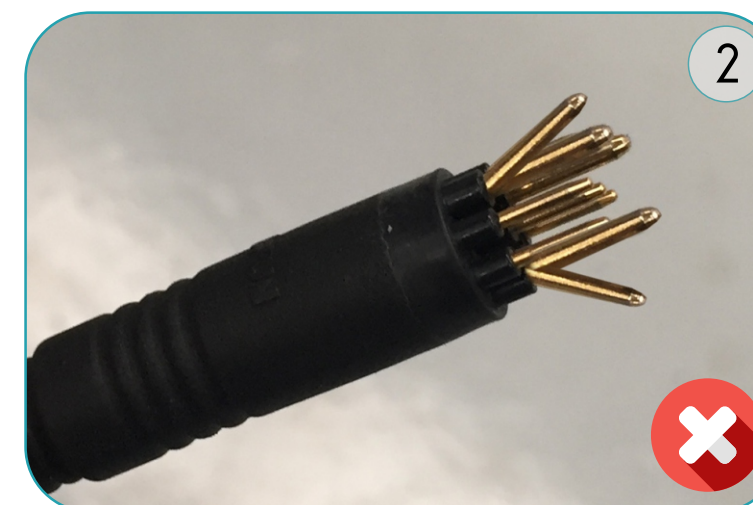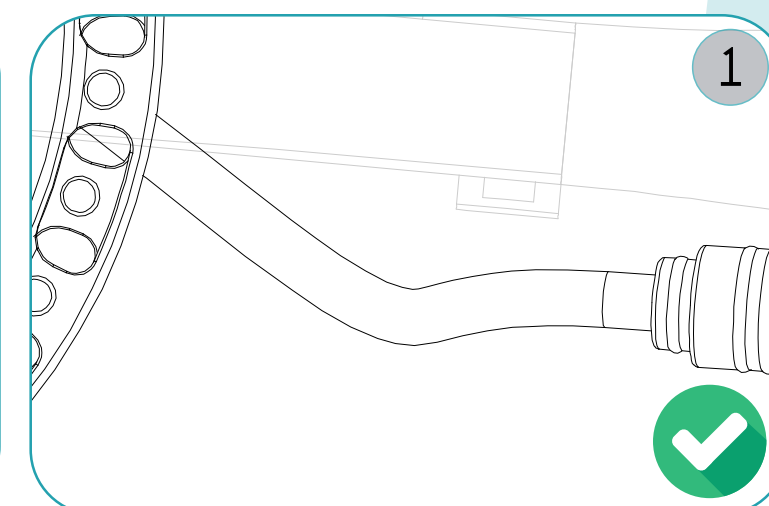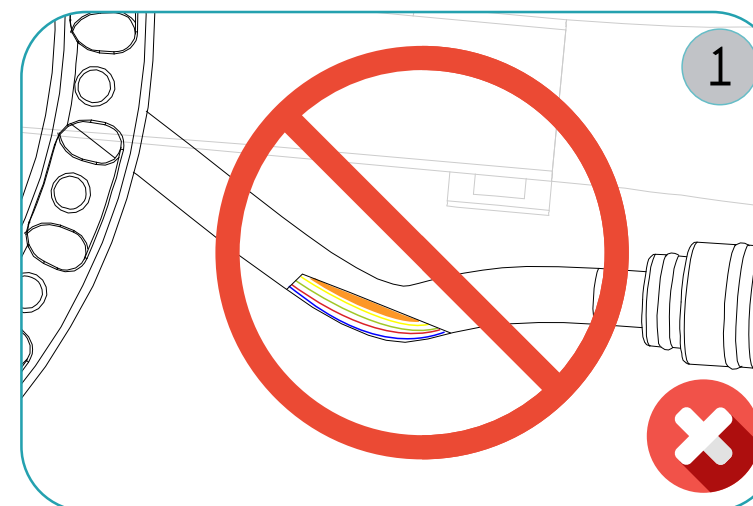



! #6

EN

3. If the error persists, disconnect the current motor.
4. Replace with a new motor.
5. Restart the system and check to make sure the error disappears.

ES

4. Si el error persiste, desconectar el motor actual.
5. Reemplazarlo por un nuevo motor.
6. Reiniciar el sistema y comprobar que el error desaparece.

DE

3. Wenn der Fehler anhält, Motor trennen.
4. Durch neuen Motor ersetzen.
5. System neu starten und überprüfen, dass der Fehler behoben ist.

FR

3. Si l'erreur persiste, débrancher le moteur actuel.
4. Remplacer ce dernier par un moteur neuf.
5. Réinitialiser le système et vérifier la disparition de l'erreur.

IT

3. Se l'errore persiste, scollegare il motore attuale.
4. Sostituirlo con un nuovo motore.
5. Riavviare il sistema e verificare che l'errore scompaia.

PT

3. Se o erro persistir, desconectar o motor actual.
4. Substituir o motor por um motor novo.
5. Reiniciar o sistema e comprovar que o erro desaparece.

