

APRESENTAMOS A NOVÍSSIMA PATRON

THE SCOTT PATRON ERIDE EMBODIES THE PERFECT BALANCE OF POWER, PRECISION, AND INNOVATION; WHERE

KEY TAKEAWAYS

SLEEK DESIGN

SCOTT'S INTEGRATED
APPROACH SEAMLESSLY
INCORPORATES THE SHOCK
AND BATTERY INTO THE
FRAME WHILE ENSURING
EASY ACCESS TO THE
COMPONENTS FOR EXCELLENT
SERVICEABILITY

SMOOTH SUSPENSION


THE WELL-BALANCED SUSPENSION LAYOUT, COMBINED WITH THE TRACLOC SYSTEM, ENSURES EXCELLENT HANDLING ACROSS ALL TERRAIN TYPES


BALANCED GEOMETRY

THE THOUGHTFULLY
DESIGNED GEOMETRY
ENSURES THE BIKE PERFORMS
EXCEPTIONALLY WELL BOTH
UPHILL AND DOWNHILL,
OFFERING STABLE YET
RESPONSIVE HANDLING.

POWERFUL MOTOR

WITH 85NM OF TORQUE AND AN 800WH BATTERY, THE BOSCH PERFORMANCE LINE CX MOTOR—THE NEWEST INNOVATION ON THE MARKET FROM BOSCH—PROVIDES A SMOOTH, POWERFUL ASSISTANCE THAT FEELS INCREDIBLY NATURAL AND EFFORTLESS.

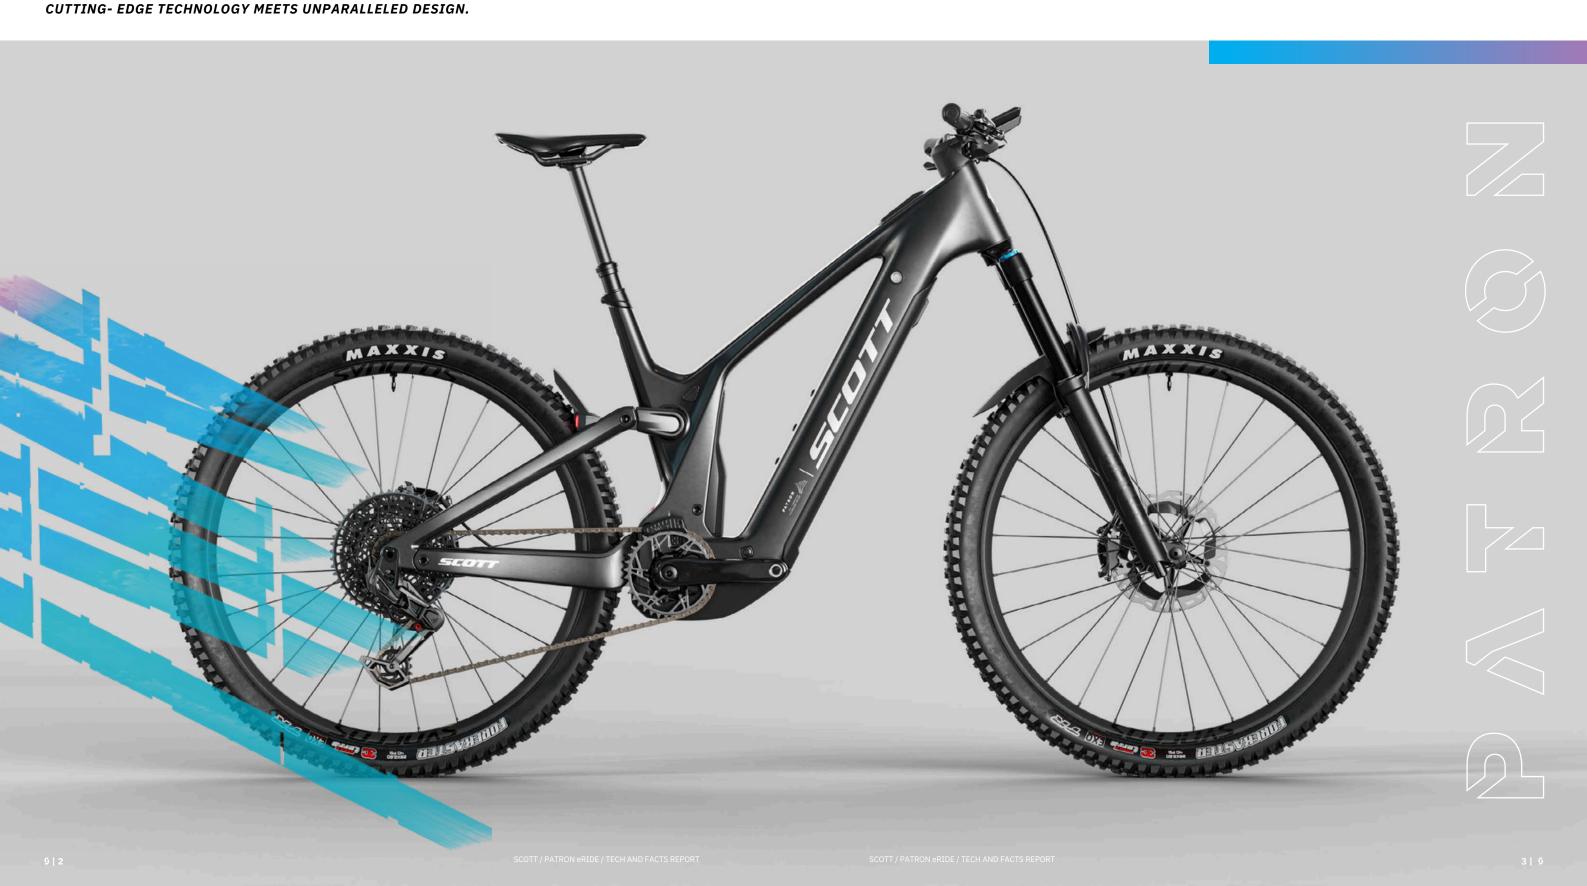

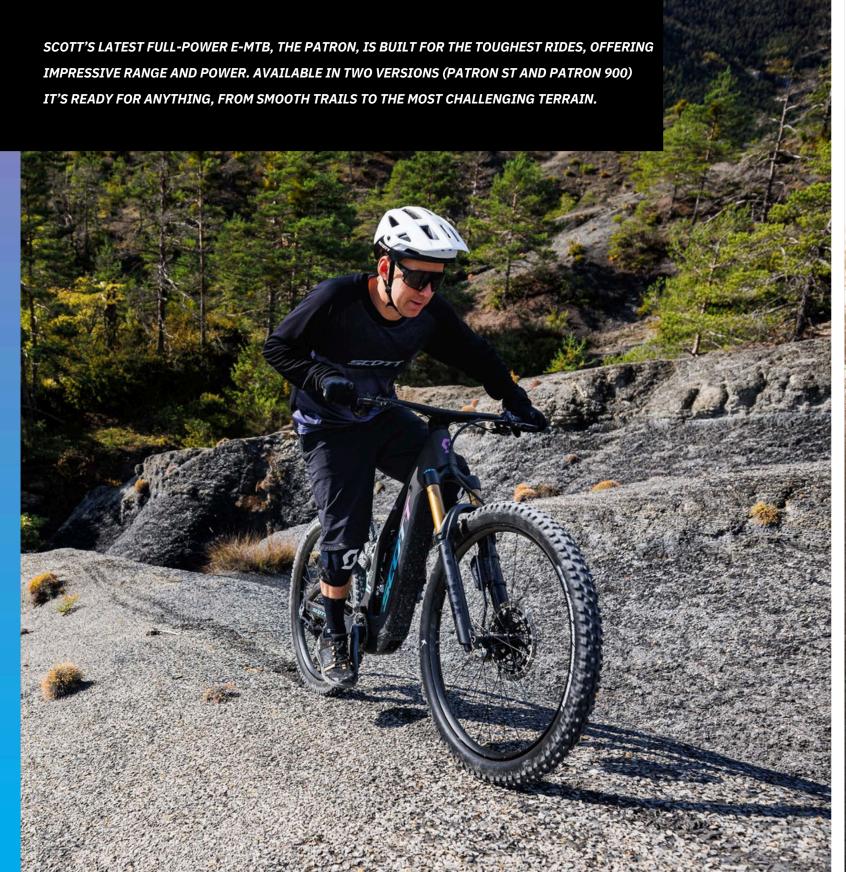

Patron ST Series: The "Super Trail" (ST) series is purpose-built for offering maximum control and stability for riders who seek adrenalineaggressive, technical riding on rough and demanding trails, with fueled descents. Despite its downhill prowess, it still features the reinforced components designed to withstand bigger impacts and dependable Bosch power system, ensuring you have the torque and intense downhill action. With 170mm of front travel and a piggyback efficiency needed to conquer steep climbs. shock in the rear, the ST platform excels when the trail points downhill,

Patron 900 Series: The Patron 900 series is crafted for all-around fun and versatility, making it the ideal choice for trail enthusiasts who want a bike that can handle a variety of conditions. With 150mm of wellbalanced front and rear travel and versatile, trail-optimized

components, the Patron 900 is perfect for riders looking for a bike that performs reliably on both climbs and descents, without compromising comfort or control. This series is the go-to option for those who want a dependable, all-mountain solution that adapts to every trail situation.



CONSTRUÇÃO DO QUADRO

GEOMETRIA DO QUADRO



The Patron's frame is available in three options: a full carbon version, a full alloy version, and a hybrid version featuring a carbon main frame combined with an alloy rear triangle. All frame configurations feature the same modern geometry, innovative integration, and a sleek design, ensuring a consistent riding experience across all models. The 900 and ST models share the same versatile 150mm travel frame, making them ideal for various riding conditions. Compared to the previous model the shock has been repositioned to a lower, more centralized location


to improve weight distribution and overall performance. Redesigned covers with mechanical and magnetic fastenings provide easy access to integrated components.

With its 55mm chainline, the Patron accommodates up to 2.6" tires, giving you the option to run wide tires for maximum grip and comfort or to leave extra clearance for optimal performance in muddy conditions.



Balance is key and the Patron's geometry offers the perfect blend of Both the Patron and Patron ST feature 150mm of rear travel, with the 900 fun, control, efficiency, and comfort. It's designed to give you matching that in the front. The ST, however, is equipped with a 170mm confidence and agility on downhills while enabling powerful riding and fork, offering extra travel for added control and slackening the geometry efficient climbing with motor assistance.

for rougher trails.

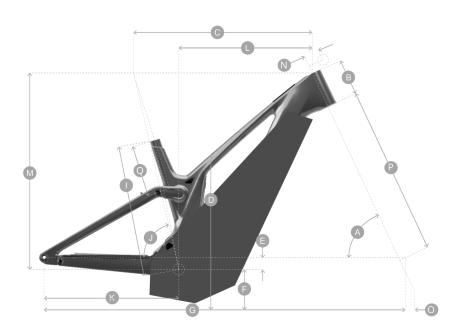

	-0.6° headset setting	S		М		L		XL	
		Patron 900	Patron ST						
Α	HT Angle	65,8°	64,9°	65,8°	64,9°	65,8°	64,9°	65,8°	64,9°
В	HT Length	120		125		135		145	
С	TT Horizontal	579,3	582,4	605,5	607,9	626,6	629,7	657	660, 2
D	Standover height	719		719		729		732	
E	BB offset	-36,2	-28,4	-36,1	-28,4	-35,9	-28,4	-35,8	-28,5
F	BB height	340,8	348,6	340,9	348,6	341,1	348,6	341,2	348,5
G	Wheelbase	1212,8	1222,3	1234,9	1244,5	1264,7	1274,2	1298,4	1308
Н	BB center to TT center								
I	BB center to top of ST	405		435		470		500	
- J	ST angle (effective)	77,4°	76,4°	77,2°	76,3°	77,2°	76,3°	77,2°	76,3°
K	CS length	453,5	454	453,5	454	453,5	454	453,5	454
<u> </u>	Reach	439,4	428,3	459,3	448,3	484,7	473,9	514,2	503,4
M	Stack	643	650,5	647,4	655	656,3	664,2	665,1	673,3
N 0	Stem length Trail	50		50		50		50	
P	Fork length	120,4	127,9	120,6	127,9	120,8	127,9	120,9	127,9
0	Max Seatpost insertion	561	584	561	584	561	584	561	584
R	Crank length	200		230		265		29	
	3	165		165		165		5	

16

7 | 9

SCOTT / PATRON eRIDE / TECH AND FACTS REPORT 5

TECNOLOGIA DE SUSPENSÃO INTEGRADA

The new Patron integrates our patented Suspension Technology, which enhances performance by lowering the bike's center of gravity. This design improvement results in superior handling and a more stable, confidence-inspiring ride. Furthermore, the shock is well-protected from the elements, preserving its performance. As a bonus, these thoughtful design elements contribute to a visually striking and impressive bike.

SCOTT / PATRON eRIDE / TECH AND F. 9 | 8

CAPA DO MOTOR

The motocross-inspired cover is the thickest component ever developed and produced by SCOTT, providing exceptional protection

for the motor and ensuring the bike can handle any trail conditions.

Its easy removal allows convenient access to the Bosch drive unit.



CABLE MANAGEMENT

For both hydraulic and mechanical housings, we've designed the most natural routing for them to enter and exit the frame. The goal is to reduce friction by avoiding unnecessary bends and to ensure optimal

functionality. This natural path runs from the rear wheel through the chainstay, then up the seat tube and along the top tube to the head tube.

SCOTT / PATRON eRIDE / TECH AND FACTS REPORT 9 | 5

SISTEMA DE SUSPENSÃO TRACLOC

The Patron 900 features our TracLoc suspension system, a proprietary SCOTT design that connects the shock to a handlebar remote, allowing you to switch between three modes for versatile performance. When transitioning from Descend mode to Traction Control, two key changes occur: the air volume in the shock is reduced, and compression damping is adjusted.

These adjustments alter the bike's dynamic geometry: you sit higher in the shock's travel, which increases ground clearance and positions

you more effectively for power transfer on snappy singletrack and technical climbs. As a result, the bike becomes more agile, nimble, and efficient without sacrificing traction or sensitivity.

Additionally, the shock includes a lockout mode, which is the firmest setting and ideal for long climbs on smoother surfaces as you approach the trailhead. This mode also features a blow-off mechanism to protect the suspension from damage during unexpected impacts.





INDICADOR SAG

Setting sag and checking travel usage with the Patron is as easy as on our other integrated shock bikes. An external indicator on the linkage allows the rider to effortlessly adjust the sag and monitor how much travel is being used.

The Patron ST is designed for riders who go all-in on downhill performance, requiring a shock that meets specific demands. While this shock also features three modes that can be controlled with a remote, we've made some unique adjustments compared to the Patron 900 shocks.

Building on positive feedback from our ramp control options in previous Genius , Ransom and Voltage eRide models, we introduced the Float-X shock, allowing for on-the-fly adjustments. In Descend mode, both air chambers are open, providing access to 150mm of specifically tuned suspension travel. When you switch to Ramp Control mode, one chamber closes, increasing progression within the shock. This feature acts like adding a volume spacer mid-ride, making it perfect for tackling technical singletrack and fast bike park sections.

Additionally, Climb mode closes off compression damping and modifies the bike's dynamic geometry for long climbs, helping you conserve energy for the descent. The Float-X also includes a Low-Speed compression adjust dial for further tuning. In summary, the Patron ST is fully equipped to handle the most challenging trails, delivering exceptional performance and responsiveness.

SCOTT / PATRON eRIDE / TECH AND FACTS REPORT


ACESSO AO AMORTECEDOR E À BATERIA

CAPACIDADE MONUMENTAL

Both the shock and battery are independently accessible, allowing for quicker maintenance with fewer disassembly steps. Additionally, the bike frame is equipped with magnet-guided, tool-free covers that are secured with a locking mechanism for reliable performance and allow easy access to key components.

The Patron features the new integrated 800Wh Bosch battery, providing ample range for long, demanding mountain rides. This battery seamlessly fits into the bike's silhouette, while the downtube door allows for easy removal and effortless charging. For riders seeking

even more range, the Bosch PowerMore Range Extender adds an additional 250Wh, offering a total of 1050Wh and ensuring longer days on the trails without range anxiety.

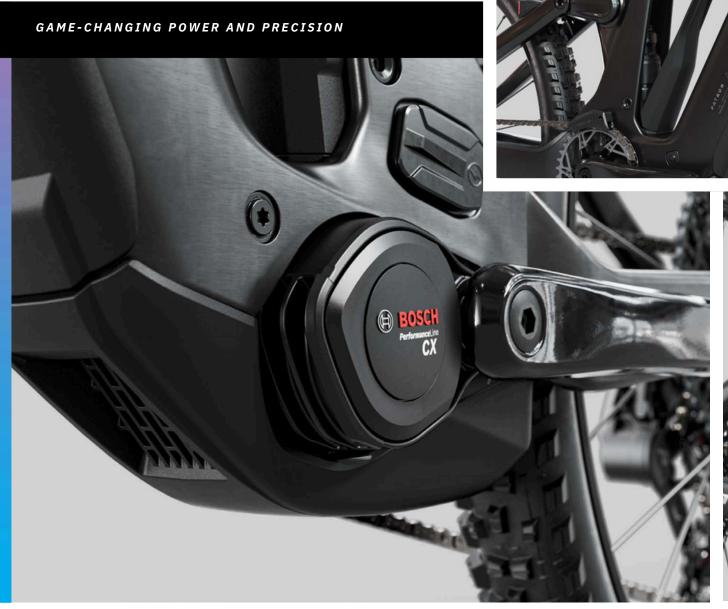

The Patron is designed to dominate the trails, striking the perfect balance between agility and control. At its core is the new Bosch Performance Line CX drive unit, engineered for riders who demand

uncompromised power. With a maximum output of 600W and a continuous power output of 250W, this motor effortlessly tackles steep climbs and navigates technical terrain with ease.

The crank-based design lowers the center of gravity, resulting in stable and responsive handling, ensuring that riders feel connected to the trail while enjoying the boost.

5 | 12 SCOTT / PATRON eRIDE / TECH AND FACTS REPORT SCOTT / PATRON eRIDE / TECH AND FACTS REPORT 13 | 5

CONTROLO SEM ESFORÇO

To ensure you're always in control, the Patron features Bosch displays and remotes that simplify mode changes and keep track of your ride without distracting from the trail. The minimalist design allows for seamless integration with the bike.

BOSCH MINI REMOTE


CHANGE MODES ON THE FLY WITHOUT TAKING YOUR EYES OFF THE TRAIL.

KIOX 300

PROVIDES REAL-TIME STATS, INCLUDING SPEED, DISTANCE, AND NAVIGATION, AVAILABLE ON THE PATRON 900 AND 910 MODELS.

INTUVIA 100

DISPLAYS ESSENTIAL INFORMATION SUCH AS SPEED, DISTANCE, RIDING MODE, AND BATTERY LEVEL, FEATURED ON THE PATRON 920.

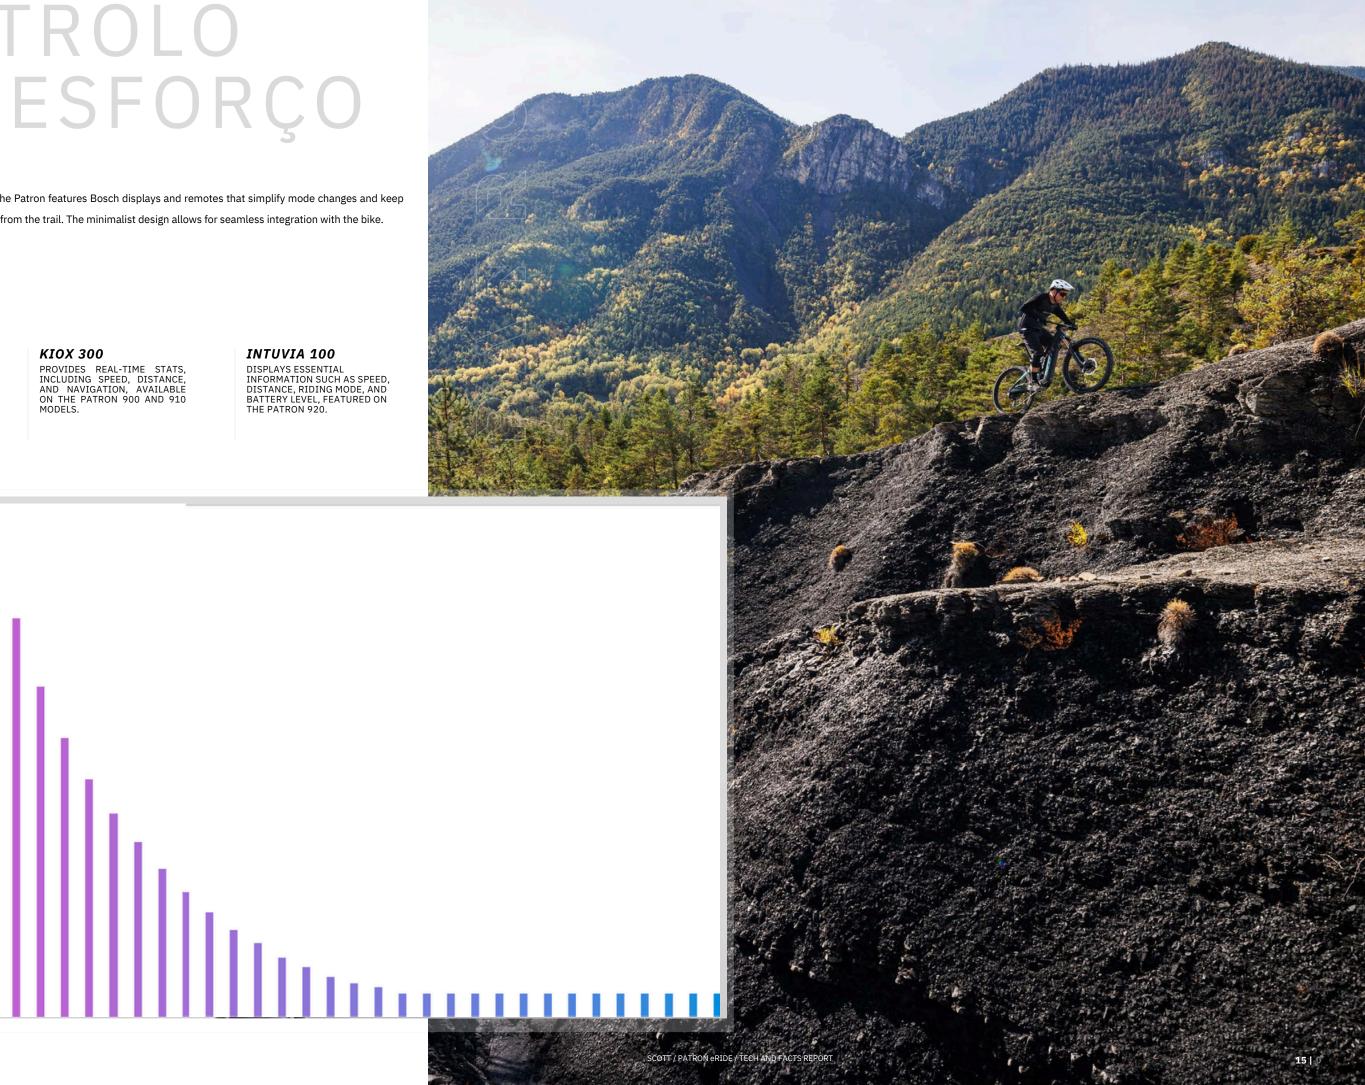

CONTROLO OTIMIZADO PARA MAIOR VELOCIDADE

Selected Patron models come equipped with Bosch ABS Pro, a braking system designed to improve traction on challenging surfaces.

This advanced system automatically adjusts brake pressure based on current conditions, allowing you to maintain focus on the trail ahead. If you find yourself braking late while descending, you can rely on the ABS to help you maintain control and optimize your speed, allowing you to brake later on purpose with confidence.

Bosch ABS Pro is avail- able on the Patron ST 900 Tuned and Patron 900 models.

KIT DE ACABAMENTO SYNCROS

The Patron features a Hixon Cockpit from Syncros in either one-piece carbon integrated cockpit, or a more traditional two-piece bar and stem. Both of these have two options for rise depending on frame size (15mm and 25mm) and two stem lengths. Multiple options exist for computer mounts, lights, etc. Swapping head angle is easy. Just take off your cockpit, remove headset cups, rotate them each 180 degrees,


and reassemble. No need to cut any cables or bleed any brakes. Cable integration is not exclusive to the one-piece cockpits though, with the possibility to mount on the stem cap, but also out the front of the bar using two threaded inserts. All cables flow neatly under the bar and into the headset leading to a clean, clutter free cockpit.

17 | 9



SCOTT / PATRON eRIDE / TECH AND FACTS REPORT

TT / PATRON eRIDE / TECH AND FACTS REPORT

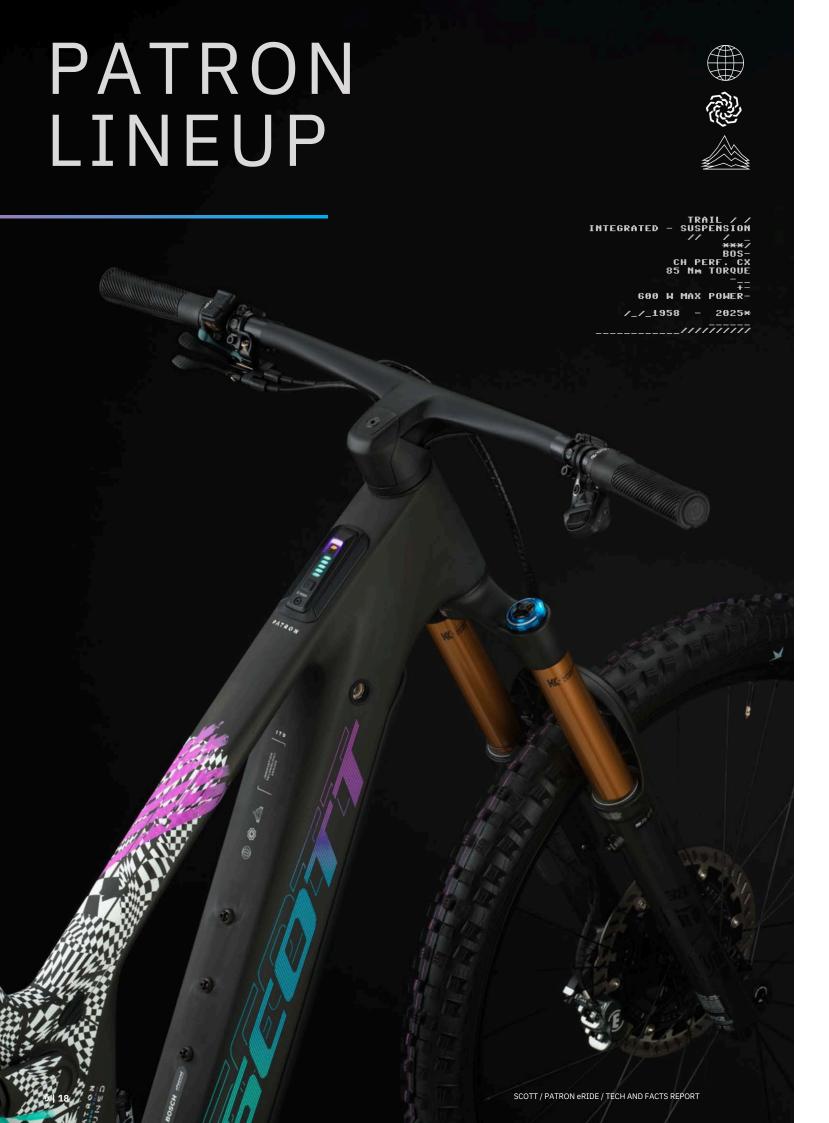



WHAT'S NEW

NEW MODEL, Bosch CX DU, Bosch PT800, Bosch ABS Pro, FOX 36 Perf. Grip

FRAME Carbon Main Frame / Alloy SST-CST; Integrated Suspension REAR DERAILLEUR SRAM GX Eagle AXS Transmission 12 Speed;
Technology, Virtual 4 Link kinematic / Adjustable head angle;
Syncros Cable Integration System; Bosch Smart System /
UDH Interface / 12x149mm with 55mm Chainline;

CRANKET SRAM AXS Pod Controller

CRANKET SRAM GX Eagle / Alloy

CRANKET SRAM GX Eagle / Alloy

TRAVELFront: 150mm / Rear: 150mm FORK FOX 36 Perf. Air / eMTB+ / Grip / Comp & Reb Adj. / QR Axle 15x110mm axle; 44mm offset / tapered steerer / 150mm travel

REAR SHOCK FOX NUDE 6T EVOL Trunnion; SCOTT custom w. travel /

geo adj.; 3 modes: Lockout-Traction Control-Descend; Low Speed Adj. / Custom large Air volume / Reb. Adj.; Bearing Hardware / Travel 150REMOJE SYSTEM SIZEN/SIGNOS 2 Technology; Suspension & Dropper Remote; 3 modes

DRIVE UNITBOSCH Performance CX; EU: 25kmh / INT: 20mph

BATTERYPowerTube 800Wh

DISPLAYBosch System Controller; Mini Remote & Kiox 300 CHARGER 4A Charger

CRANKSET SRAM GX Eagle / Allov

CHAINRINGSRAM Fagle Transmission 34T chainring

CHAIN SRAM CN GX Eagle Transmission

220mm / Rear: MDR-P 203mm

HANDLEBAR; Syncros Hixon 1.5 Alloy 7050; Size S & M 15mm rise / Size L & XL 25mm rise; back sweep 8° / 780mm; Syncros Performance XC lock-on grips

HANDLEBAR STEM Syncros AM 1.5; Syncros Cable Integration System;

4° rise / 7050 Alloy / 31.8mm / 1.1/8"

SEATPOST Syncros Duncan Dropper Post 1.55 / Travel Adjust / 31.6mm;
S size 140mm / M size 180mm / L size 180mm / XL size 210mm

SEAT Syncros Tofino-E 1.5 Regular; Titanium rails
HEADSET Syncros - Acros Angle adjust & Cable Routing HS System;
Stainless / +-0.6° head angle adjustment;
Z556/28.6 - Z556/40 MTB

HUB (FRONT) Formula DC-711 / 15x110mm HUB (REAR) Formula EHT-1481 / Boost 148x12mm

SPOKES Stainless Black

CASSETTE SRAM GX Eagle XS 1275 Transmission 10-52

RIMS Syncros MD30 / 32H / 30mm / Pin Joint; Tubeless read;
BRAKES Magura MT7 4 Piston / Bosch ABS Pro, Front: FROTT JBES Maxxis Forekaster 29x2.6"; 120TPI Foldable Bead;
EXO / TR Tubeless ready; 3C Maxx Terra RIMS Syncros MD30 / 32H / 30mm / Pin Joint; Tubeless ready

EXO / TR Tubeless ready; 3C Maxx Terra

REAR TIRES Maxxis Forekaster 292.6"; 120 TPI Foldable Bead;
EXO / TR Tubeless ready; 3C Maxx Terra

LIGHTS Syncros integrated rear fender light;
Front Light Cable pre-installed

EXTRAS Syncros Fork Fender; SRAM AXS Extension Cord

PATRON 900 (P) (25) (PAW) (29) 423355-8086 (EU 1) 423398-8086 (INT) 7 999,99€

NEW MODEL, Bosch CX DU, Bosch PT800, Bosch ABS Pro, FOX 36 Perf. Grip

FRAME Carbon Main Frame / Alloy SST-CST; Integrated Suspension REAR DERAILLEUR SRAM GX Eagle AXS Transmission 12 Speed; Wireless Technology, Virtual 4 Link kinematic / Adjustable head angle; Syncros Cable Integration System; Bosch Smart System / UDH Interface / 12x/148mm with 55mm Chainline; Bosch PowerMore Ready

SHIFTERS SRAM AXS Pod Controller CRAIKSET SRAM GX Eagle / Alloy

TRAVELFront: 150mm / Rear: 150mm FORK FOX 36 Perf. Air / eMTB+ / Grip / Comp & Reb Adj. / QR Axle 15x110mm axle; 44mm offset / tapered steerer / 150mm travel

REAR SHOCK FOX NUDE 6T EVOL Trunnion; SCOTT custom w. travel /

geo adj.; 3 modes: Lockout-Traction Control-Descend; Low Speed Adj. / Custom large Air volume / Reb. Adj.; Bearing Hardware / Travel 150-REMOTE SYSTIEM \$EE\$TX556attoc 2 Technology; Suspension & Dropper Remote; 3 modes DRIVE UNITBosch Performance CX; EU: 25kmh / INT: 20mph

BATTERYPowerTube 800Wh

CHARGER 4A Charger

CHAINGUIDE e*thirteen / e*spec Slider CHAINRINGSRAM Eagle Transmission 34T chainring CHAIN SRAM CN GX Eagle Transmission

CASSETTE SRAM GX Eagle XS 1275 Transmission 10-52

CASSETTE SRAM GX Eagle X5 1275 Transmission 10-52

BRAKES Magura MT7 4 Piston / Bosch ABS Pro, Front: FIND FIND SYNCROS MULSO / 120TPI Foldable Bead;
220mm / Rear: MDR-P 203mm

NDLEBAR Syncros Hixon 1.5 Alloy 7050; Size S & M 15mm rise / Size L & XL 25mm rise; back sweep 8° / 780mm; Syncros Performance XC lock-on grips - 120TPI Foldable Syncros Performance Clock-on grips - 120TPI Foldable Syncros Performance Clock-on grips - 120TPI Foldable Syncros Performance - 120TPI Foldable Syncros Performance - 120TPI Foldable Syncros Performance - 120TPI Foldable Syncros Research Res HANDLEBAR Syncros Hixon 1.5 Alloy 7050; Size S & M 15mm rise / Size L & XL 25mm rise; back sweep 8° / 780mm; Syncros Performance XC lock-on grips

HANDLEBAR STEM Syncros AM 1.5; Syncros Cable Integration System; 4° rise / pre-installed pre-17050 Alloy / 31.8mm / 1.1/8"

SEATPOST Syncros Duncan Dropper Post 1.5S / Travel Adjust / 31.6mm;
S size 140mm / M size 180mm / L size 150mm / XL size 210mm

HEADSET Syncros - Acros Angle adjust & Cable Routing HS System; Stainless / +-0.6° head angle adjustment; ZS56/28.6 – ZS56/40 MTB HUB (FRONT) Formula DC-711 / 15x110mm

HUB (REAR) Formula EHT-1481 / Boost 148x12mm SPOKES Stainless Black

RIMS Syncros MD30 / 32H / 30mm / Pin Joint; Tubeless ready

pre-installed

EXTRAS Syncros Fork Fender; SRAM AXS Extension Cord

SCOTT / PATRON eRIDE / TECH AND FACTS REPORT 19 | 5



WHAT'S NEW

NEW MODEL, Bosch CX DU, Bosch PT800, FOX 36 Rhythm Grip, SRAM S1000 Eagle AXS RD, SRAM CS XS 1270

FRAME Carbon Main Frame / Alloy SST-CST; Integrated Suspension REAR DERAILLEUR SRAM \$1000 Eagle AXS Transmission 12 Speed; Wireless Technology; Virtual 4 Link kinematic / Adjustable head angle; Syncros Cable Integration System; Bosch Smart System / UDH Interface / 12x148mm with 55mm Chainline; Bosch DewserMore Deade, Technology (CRAINESET FSA Alloy CRAINESET FSA Alloy CRAINESET FSA Alloy CRAINESET FSA Alloy CRANKSET FSA Alloy

TRAVELFront: 150mm / Rear: 150mm
FORK FOX 36 Rhythm Air / eMTB+ / Grip / Comp & Reb Adj. /
OR Axle 15x110mm axle; 44mm offset / tapered steerer /
150mm travel

REAR SHOCK FOX Float EVOL Trunnion; 3 modes / Lockout-Trail-Descend; DPS/ Reb. Adj.; Travel 150mm / 185x55mm REMOTE SYSTEM SCOTT TracLoc 2 Technology; Suspension & Dropper Remote; 3 modes

DRIVE UNITBosch Performance CX: FU: 25kmh / INT: 20mph BATTERYPowerTube 800Wh

DISPLAYBosch System Controller; Mini Remote & Kiox 300 CHARGER 4A Charger

CHAINGUIDE e*thirteen / e*spec Slider CHAINRINGSCOTT custom spider / SRAM Eagle Transmission 34T

chainring

CHAIN SRAM CN GX Eagle Transmission CASSETTE SRAM Eagle XS 1270 Transmission 10-52

CASSETTE SRAM Eagle XS 1270 Transmission 10-52

BRAKES Shimano Deore M6120 4-Piston Disc, Front: SM-RT64EQ/ TR Tubeless ready, 3C Maxx Terra

220mm / Rear: SM-RT64 CL 203mm

NOTERAR Syntrons Hixtor 2 of Allow 6061. Size S & M 15mm rise / Size I & EXO / TR Tubeless ready; 3C Maxx Terra

EXO / TR Tubeless ready; 3C Maxx Terra

EXO / TR Tubeless ready; 3C Maxx Terra HANDLEBAR Syncros Hixon 2.0 Alloy 6061; Size S & M 15mm rise / Size L & XL 25mm rise / back sweep 8° / 780mm; Syncros Endurance lock-on grips

HANDLEBAR STEM Syncros AM 2.0; Syncros Cable Integration System; 4° rise / APPROX. WEIGHT Check website 6061 Alloy / 31.8mm / 11/8"

SEATPOST Syncros Duncan Dropper Post 2.5; 31.6mm / S size 125mm / M size 150mm / L size 170mm / XL size 200mm

SEAT Syncros Tofino-E 2.0 Regular

HEADSET Syncros - Acros Angle adjust & Cable Routing HS System Stainless / +-0.6° head angle adjustment; ZS56/28.6 – ZS56/40 MTB

HUB (FRONT) Formula CL-811 / 15x110mn HUB (REAR) Formula ECT-148S / Boost 148x12mm

RIMS Syncros MD30 / 32H / 30mm / Pin Joint: Tubeless ready

LIGHTS Syncros integrated rear fender light; Front Light Cable pre-installed

EXTRAS Syncros Fork Fender; SRAM AXS Extension Cord

(P) (25) (29) PATRON 910 MAUVE PURPLE 423403-7963 (EU 1) 423366-7963 (INT) 6 999,99€ MAXXIS

9 | 20

NEW MODEL, Bosch CX DU, Bosch PT800, FOX 36 Rhythm Grip, SRAM S1000 Eagle AXS RD, SRAM CS XS 1270

FRAME Carbon Main Frame / Alloy SST-CST; Integrated Suspension REAR DERAILLEUR SRAM S1000 Eagle AXS Transmission 12 Speed;
Technology; Virtual 4 Link kinematic / Adjustable head angle;
Syncros Cable Integration System; Bosch Smart System /
UDH Interface / 12x148mm with 55mm Chainline; Bosch
PowerMore Ready

CRANKSET SRAM AXS Pod Controller**
CRANKSET** FSA Alloy

CRANKSET SRAM S1000 Eagle AXS Transmission 12 Speed;
Wireless Electronic Shift System

SHITTERS SRAM AXS Pod Controller**
CRANKSET** SRAM S1000 Eagle AXS Transmission 12 Speed;
Wireless Electronic Shift System

SHITTERS SRAM AXS Pod Controller**
CRANKSET** SRAM S1000 Eagle AXS Transmission 12 Speed;
Wireless Electronic Shift System

SHITTERS SRAM S1000 Eagle AXS Transmission 12 Speed;
Wireless Electronic Shift System

SHITTERS SRAM S1000 Eagle AXS Transmission 12 Speed;
Wireless Electronic Shift System

SHITTERS SRAM AXS Pod Controller**

CRANKSET SRAM S1000 Eagle AXS Transmission 12 Speed;

SHITTERS SRAM S1000 Eagle AXS Transmission 12 Speed;

SHITTERS SRAM S1000 Eagle AXS Transmission 12 Speed;

SHITTERS SRAM S1000 Eagle AXS Transmission 12 Speed;

CRANKSET SRAM S1000 Eagle AXS Transmission 12 Speed;

**CRA

TRAVELFront: 150mm / Rear: 150mm FORK FOX 36 Rhythm Air / eMTB+ / Grip / Comp & Reb Adj. / QR Axle 15x110mm axle; 44mm offset / tapered steerer / 150mm travel

REAR SHOCK FOX Float EVOL Trunnion; 3 modes / Lockout-Trail-Descend; DPS/ Reb. Adj.; Travel 150mm / 185x55mm REMOTE SYSTEM SCOTT TracLoc 2 Technology; Suspension & Dropper Remote; 3 modes

DRIVE UNITBosch Performance CX; EU: 25kmh / INT: 20mph BATTERYPowerTube 800Wh

DISPLAYBosch System Controller: Mini Remote & Kiox 300

CHAINGUIDE e*thirteen / e*spec Slider CHAINRINGSCOTT custom spider / SRAM Eagle Transmission 34T

chainring

CHAIN SRAM CN GX Eagle Transmission

HANDLEBAR Syncros Hixon 2.0 Alloy 6061; Size S & M 15mm rise / Size L & XL 25mm rise / back sweep 8° / 780mm; Syncros Endurance lock-on grips

SEAT Syncros Tofino-E 2.0 Regular

HUB (FRONT) Formula CL-811 / 15x110mm HUB (REAR) Formula ECT-148S / Boost 148x12mm

SPOKES Stainless Black

LIGHTS Syncros integrated rear fender light; Front Light Cable pre-installed

APPROX. WEIGHT Check website

HEADSET Syncros - Acros Angle adjust & Cable Routing HS System; Stainless / +-0.6° head angle adjustment; ZS56/28.6 – ZS56/40 MTB

RIMS Syncros MD30 / 32H / 30mm / Pin Joint; Tubeless ready

CASSETTE SRAM Eagle XS 1270 Transmission 10-52

BRAKES Shimano Deore M6120 4-Piston Disc, Front:
220mm / Rear: SM-RT64 CL 203mm

220mm / Rear: SM-RT64 CL 203mm

EARN ITES Maxxis Forekaster 29x.6°; 120TPI Foldable Bead;
EXO / TR Tubeless ready; 3C Maxx Terra
EXEM TIES Maxxis Forekaster 29x.6°; 120TPI Foldable Bead;
EXO / TR Tubeless ready; 3C Maxx Terra
EXEM TIES Maxxis Forekaster 29x.6°; 120TPI Foldable Bead;
EXO / TR Tubeless ready; 3C Maxx Terra

EXTRAS Syncros Fork Fender; SRAM AXS Extension Cord



WHAT'S NEW

NEW MODEL, Bosch CX DU, Bosch PT800, RockShox Psylo Silver RC

kinematic / Adjustable head angle; Syncros Cable Integratic System; Bosch Smart System / UDH Interface / 12x148mm with 55mm Chainline; Bosch PowerMore Ready

TRAVELFront: 150mm / Rear: 150mm

FORK RockShox Psylo Silver RC Air / E-Bike / Comp & Reb Adj. /
OR Axle 15x110mm axle; 44mm offset / tapered steerer /
150mm travel

REAR SHOCK X-Fusion NUDE 5 RLX Trunnion; SCOTT custom w. travel / geo adj.; 3 modes: Lockout-Traction Control-Desce Reb. Adj.; Travel 150-100-Lockout / T185X55mm

REMOTE SYSTEM SCOTT TracLoc 2 Technology; Suspension & Dropper Remote; 3 modes DRIVE UNITBosch Performance CX; EU: 25kmh / INT: 20mph BATTERYPowerTube 800Wh

DISPLAYBosch System Controller; Mini Remote & Intuvia 100 CHARGER 4A Charger

FRAME Alloy Frame; Integrated Suspension Technology; Virtual 4 LinREAR DERAILLEUR Shimano Deore RD-M6100 SGS; Shadow Plus / 12 Speed SHIFTERS Shimano Deore SL-M6100-IR / Rapidfire Plus

CRANKSET FSA Alloy CHAINGUIDE e*thirteen / e*spec Slider CHAINRING FSA 12 Speed 34T chainring CHAIN Shimano CN-M6100

CASSETTE Shimano CS-M6100 / 10-51 / Rear: SM-RT64 CL 203mm

HANDLEBAR Syncros Hixon 2.0 Alloy 6061; Size S & M 15mm rise /

XL 25mm rise / back sweep 8° / 780mm; Syncros Endurance lock-on pre-installed

HANDSIBAR STEM Syncros AM 2.0; Syncros Cable Integration System; 4° rise / APPROX. WEIGHT Check website

6061 Alloy / 31.8mm / 1 1/8"

SEATPOST Syncros Duncan Dropper Post 2.5; 31.6mm / S size 125mm / M size 150mm / L size 170mm / XL size 200mm

SEAT Syncros Tofino-E 2.5 Regular

HEADSET Syncros - Acros Angle adjust & Cable Routing HS System / +-0.6° head angle adjustment; ZS56/28.6 – ZS56/40 MTB HUB (FRONT) Formula CL-811 / 15x110mm

HUB (REAR) Formula ECT-148M / Boost 148x12mm SPOKES Stainless Black

CHAIN Shimano CN-M6100

CASSETTE Shimano CS-M6100 / 10-51

BRAKES Shimano MT520 4 Piston Disc, Front: SM-RT64 CL 22000 R Tubeless ready; 3C Maxx Terra

REAR TIRES Maxxis Forekaster 29x2.6": 120TPI Foldable Bead: EXO / TR Tubeless ready; 3C Maxx Terra

LIGHTS Syncros integrated rear fender light; Front Light Cable pre-installed



WHAT'S NEW

NEW MODEL, Bosch CX DU, Bosch PT800, RockShox Psylo Silver RC

FRAME Alloy Frame; Integrated Suspension Technology; Virtual 4 Link kinematic / Adjustable head angle; Syncros Cable Integration Read Vision BerailLEUR Shimano Deore RD-M6100 SGS; Shadow Plus / 12 Speed System; Bosch Smart System / UDH Interface / 12x148mm with 55mm Chainline; Bosch PowerMore Ready

SHIFTERS Shimano Deore SL-M6100-IR / Rapidfire Plus TRAVELFront: 150mm / Rear: 150mm

FORK RockShox Psylo Silver RC Air / E-Bike / Comp & Reb Adj. / OR Axle 15x110mm axle; 44mm offset / tapered steerer / 150mm travel

REAR SHOCK X-Fusion NUDE 5 RLX Trunnion; SCOTT custom w. travel /
geo adj.; 3 modes: Lockout-Traction Control-Descend; Reb.
Adj.; Travel 150-100-Lockout / T185X55mm
REMOTE SYSTEM SCOTT TracLoc 2 Technology; Suspension & Dropper Remote: 3 modes

DRIVE UNITBosch Performance CX; EU: 25kmh / INT: 20mph BATTERYPowerTube 800Wh DISPLAYBosch System Controller; Mini Remote & Intuvia 100 CHARGER 4A Charger

CRANKSET FSA Alloy

CHAINGUIDE e*thirteen / e*spec Slide CHAINRING FSA 12 Speed 34T chainring

CHAIN Shimano CN-M6100 CASSETTE Shimano CS-M6100 / 10-51

HANDLEBAR Syncros Hixon 2.0 Alloy 6061; Size S & M 15mm rise

HANDLEBAR STEM Syncros AM 2.0; Syncros Cable Integr 4° rise / 6061 Alloy / 31.8mm / 1 1/8"

SEATPOST Syncros Duncan Dropper Post 2.5; 31.6mm / S size 125mm / M SEATPOST Syncros Duncan Dropper Post 2.5; 31.6mm / S size 125mm / Lsize 170mm / Lsize 170mm / XL size 200mm SEAT Syncros Tofino-E 2.5 Regular HEADSET Syncros - Acros Angle adjust & Cable Routing HS System / +0.6° head angle adjustment; 2556/28.6 – ZS56/40 MTB HUB (FRONT) Formula CL-811 / 15x110mm

HUB (REAR) Formula ECT-148M / Boost 148x12mm

SPOKES Stainless Black

APPROX. WEIGHT Check website

SCOTT / PATRON eRIDE / TECH AND FACTS REPORT SCOTT / PATRON eRIDE / TECH AND FACTS REPORT 21 | 9



WHAT'S NEW

NEW MODEL, Bosch CX DU, Bosch PT800, RockShox Psylo Silver RC

FRAME Alloy Frame; Integrated Suspension Technology; Virtual 4 LinREAR DERAILLEUR Shimano Deore RD-M6100 SGS; Shadow Plus / 12 Speed kinematic / Adjustable head angle; Syncros Cable Integration System; Bosch Smart System / UDI Interface / 12x148mm with 55mm Chainline; Bosch PowerMore Ready

SHIFTERS Shimano Deore SL-M6100-IR / Rapidfire Plus CRAIKSET FSA Alloy TRAVELFront: 150mm / Rear: 150mm

FORK RockShox Psylo Silver RC Air / E-Bike / Comp & Reb Adj. / OR Axle 15x110mm axle; 44mm offset / tapered steerer / 150mm travel REAR SHOCK X-Fusion NUDE 5 RLX Trunnion; SCOTT custom w. travel /

geo adj.; 3 modes: Lockout-Traction Control-Descend; Reb. Adj.; Travel 150-100-Lockout / T185X55mm REMOTE SYSTEM SCOTT TracLoc 2 Technology; Suspension & Dropper

Remote; 3 modes

DRIVE UNITBosch Performance CX; EU: 25kmh / INT: 20mph BATTERYPowerTube 800Wh

DISPLAYBosch System Controller; Mini Remote & Intuvia 100

CHARGER 4A Charger

CHAINGUIDE e*thirteen / e*spec Slide CHAINRING FSA 12 Speed 34T chainring CHAIN Shimano CN-M6100

CASSETTE Shimano CS-M6100 / 10-51

/ Rear: SM-RT64 CL 203mm

// Rear: SM-RT64 CL 203mm

// Syncros Hixon 2.0 Alloy 6061; Size S & M 15mm rise / Size L & XL 25mm rise / back sweep 8° / 780mm; Syncros Endurance lock-on grips

HANDLEBAR STEM Syncros AM 2.0; Syncros Cable Integration System; 4° rise / 6061 Alloy / 31.8mm / 11/8"

SEATPOST Syncros Duncan Dropper Post 2.5; 31.6mm / S size 125mm / M size 150mm / L size 170mm / XL size 200mm

SEAT Syncros Tofino-E 2.5 Regular

HEADSET Syncros - Acros Angle adjust & Cable Routing HS System / +-0.6° head angle adjustment; ZS56/28.6 – ZS56/40 MTB HUB (FRONT) Formula CL-811 / 15x110mm

HUB (REAR) Formula ECT-148M / Boost 148x12mm SPOKES Stainless Black

RIMS Syncros MD30 / 32H / 30mm / Pin Joint; Tubeless ready **BRAKES** Shimano MT520 4 Piston Disc, Front: SM-RT64 CL 22 (2017) TR Tubeless ready; 3C Maxx Terra

REAR TIRES Maxis Forekaster 29x2.6"; 120TPI Foldable Bead; EXO / TR Tubeless ready; 3C Maxx Terra LIGHTS Syncros integrated rear fender light; Front Light Cable pre-installed

PATRON ST 900 TUNED (P) (25) (PAW) (29) CARBON BLACK 423549-3020 (EU 1) 423546-3020 (INT) 9 999,99€

NEW MODEL, Bosch CX DU, Bosch PT800, Bosch ABS Pro, FOX 38 Factory Grip X2, FOX Float X Nude Factory

FRAME Carbon Frame; Integrated Suspension Technology; Virtual
4 Link kinematic / Adjustable head angle; Syncros Cable
Integration System; Bosch Smart System / UDH Interface /
12x148mm with 55mm Chainline; Bosch PowerMore Ready

SUICEDES CRAM AVS Capita NAS Transmission 12 Speed; Wireless
Electronic Shorter Bed Controller

TRAVELFront: 170mm / Rear: 150mm FORK FOX 38 Factory Grip X2 Air / Kashima; HSC - LSC - HSR- LSR adjustable / QR Axle 15x110mm; 44mm offset / tapered steerer; 170mm travel

steerer; 170mm travel

REAR SHOCK FOX FLOAT X NUDE Factory EVOL Piggy Back Trunnion;
Kashima / SCOTT custom w. travel / geo adj.; 3 modes: Climb-Ramp Control-Descend; Custom large Air volume / Comp &
Reb. Adj. Travel 150-100-Climb / T185X55mm

REMOTE SYSTEM TracLoc Technology; Rear Suspension & Dropper Remote; 3
Rear Suspension modes

DRIJE INTERES DE FORMANCE (V. Ell.) (Slymb, INT.; 3 Open)

DRIVE UNITBosch Performance CX; EU: 25kmh / INT: 20mph

BATTERYPowerTube 800Wh

DISPLAYBosch System Controller; Mini Remote

SHIFTERS SRAM AXS Rocker Pod Controller

CRANKSET SRAM GX Eagle / Alloy CHAINGUIDE e*thirteen / e*spec Slider

CHAINRINGSRAM Eagle Transmission 34T chainring CHAIN SRAM CN GX Eagle Transmission

CASSETTE SRAM GX Eagle XS 1275 Transmission 10-52

ASSETTE SRAM GX Eagle XS 1275 Transmission 10-52

BRAKES Magura MT7 4 Piston / Bosch ABS Pro, Front: MDR-p Tubeless ready; 120191 Foliable Des BRAKES Magura MT7 4 Piston / Bosch ABS Pro, Front: MDR-p Tubeless ready; 120191 Front Light Cable pre-installed Front Light Cable pre-installed

HANDLEBAR Syncros Hixon iC Carbon; Size S & M 15mm rise / Size L & XL 25mm rise; back sweep 8° / 780mm; Syncros Endurance lock-on grips

SEATPOST Syncros Duncan Dropper Post 1.5S / Travel Adjust / 31.6mm; S size 140mm / M size 180mm / L size 180mm / XL size 210mm

SEAT Syncros Tofino-E 1.5 Regular; Titanium rails

EXTRAS Syncros Fork Fender: SRAM AXS Extension Cord APPROX. WEIGHT Check website

HEADSET Syncros - Acros Angle adjust & Cable Routing HS System; Stainless / +-0.6° head angle adjustment; ZS56/28.6 – ZS56/40 MTB WHEELSETSyncros Revelstoke-E 1.5 IS; F: 15x110mm; R: 12x148mm Boost; 30mm Tubeless ready rim 28H; Syncros Axle w/ Removable Lever with Tool FRONT TIRES Schwalbe Magic Mary 29x2.5"; SuperGravity / PSF / Ultra Soft; Tubeless ready; 120TPI Foldable Bead

REAR TIRES Schwalbe Explore 29x2.5"; SuperGravity / PSF / Soft;
t: MDR-P. Tubeless ready; 120TPI Foldable Bead

CHARGER 4A Charger
REAR DERAILLEUR Shimano Deore RD-M6100 SGS; Shadow Plus / 12 Speed SHIFTERS Shimano Deore SL-M6100-IR / Rapidfire Plus

DISPLAYBosch System Controller: Mini Remote

CRANKSET FSA Alloy

CHAIN Shimano CN-M6100 CASSETTE Shimano CS-M6100 / 10-51

CASSETTE Shimano CS-M6100 / 10-51

BRAKES Shimano Deore M6120 4-Piston Disc, Front:
220mm / Rear: SM-RT64 CL 203mm

ANDLEBAR Syncros Hixon 2.0 Alloy 6061; Size S & M.15mm rise / Size L & 2.5mm rise / back sweep 8° / 780mm; Syncros Endurance
Tubeless ready; 120TPI Foldable Bead

REAR TIRES Schwalbe Explore 29x2.5"; SuperGravity / PSF / Ultra Soft; Tubeless ready; 120TPI Foldable Bead

REAR TIRES Schwalbe Explore 29x2.5"; SuperGravity / PSF / Soft; Tubeless ready; 120TPI Foldable Bead

Tubeless ready; 120TPI Foldable Bead HANDLEBAR Syncros Hixon 2.0 Alloy 6061; Size S & M 15mm rise / Size L & XL 25mm rise / back sweep 8° / 780mm; Syncros Endurance lock-on grips

REAR SHOCK RockShox SuperDeluxe Piggy Back Trunnion / Reb Adj. / Large Air volume / Travel 150-100-Climb / T185X55mm DRIVE UNITBosch Performance CX; EU: 25kmh / 1NT: 20mph

SEAT Syncros Tofino-E 1.5 Regular; Titanium rails HEADSET Syncros - Acros Angle adjust & Cable Routing HS System Stainless / +-0.6° head angle adjustment; ZS56/28.6 - ZS56/40 MTB

8 599,99€

WHEELSETSyncros Revelstoke-E 1.5 CL; F: 15x110mm; R: 12x148mm Boost; 30mm Tubeless ready rim 28H; Syncros Axle w/ Removable Lever with Tool

ALINEMOSE AM Eagle Transmission 34T chainring

CHAIN SRAM Eagle Transmission

CASSETTE SRAM Eagle XS 1270 Transmission 10-52

BRAKES Shimano SLX / BR-M7120 4 Piston, Front: SM-RIGHS Syncros integrated rear fender light;

220mm / Rear: SM-RT64 CL 203mm

NOLEPIAS years Historic Corbon: Size S. M. M. Semples (Size I. 8. V)

Front Light Cable pre-installed

Front Light Cable pre-installed

EXTRAS Syncros Fork Fender; SRAM AXS Extension Cord

ANDLEBAR Syncros Hixon iC carbon; Size 5 & M 15mm rise / Size L & XL

25mm rise; back sweep 8° / 780mm; Syncros Endurance lock-on grips

SEATPOST Syncros Duncan Dropper Post 1.5S / Travel Adjust / 31.6mm; S size 140mm / M size 180mm / L size 180mm / XL size 210mm

Front Light Cable EXTRAS Syncros Fork Fend Approx.

EXTRAS Syncros Fork Fend Approx. WEIGHT** Check website lock-on grips

SEATPOST Syncros Duncan Dropper Post 1.5S / Travel Adjust / 31.6mm; S size 140mm / M size 180mm / L size 180mm / XL size 210mm

PATRON ST 910 LODEN GREEN 4235518109 (EU 1) 423548-8109 (INT) 5 899,99€

SHIFTERS SRAM AXS Rocker Pod Controller

CHAINRINGSRAM Eagle Transmission 34T chainring

CASSETTE SRAM Eagle XS 1270 Transmission 10-52

CHAINGUIDE e*thirteen / e*spec Slider

CRANKSET FSA Alloy

WHAT'S NEW

BATTERYPowerTube 800Wh

PATRON ST 900 RC

423550-8093 (EU 1)

423547-8093 (INT)

WHAT'S NEW

NEW MODEL, Bosch CX DU, Bosch PT800, RockShox Domain R, RockShox SuperDeluxe

NEW MODEL, Bosch CX DU, Bosch PT800, FOX 38 Perf. ELITE Grip X2, FOX Float X Nude

TRAVELFront: 170mm / Rear: 150mm

FORK FOX 38 Perf. ELITE Grip X2 Air / HSC - LSC - HSR- LSR adjustable / QR Axle 15x110mm; 44mm offset / tapered steerer; 170mm travel

REAR SHOCK FOX FLOAT X NUDE EVOL Piggy Back Trunnion / SCOTT custom w. travel / geo adj.; 3 modes: Climb-Ramp Control-Descend; Custom large Air volume / Comp & Reb. Adj. Travel 150-100-Climb / T185X55mm

REMOTE SYSTEM TracLoc Technology; Rear Suspension & Dropper Remote; 3 Rear Suspension modes

DRIVE INITIES and Defermance CVE. Plan Stumb (INIT) 20mb

DRIVE UNITBosch Performance CX; EU: 25kmh / INT: 20mph

DISPLAYBosch System Controller; Mini Remote

BATTERYPowerTube 800Wh

FRAME Carbon Frame; Integrated Suspension Technology; Virtual
4 Link kinematic / Adjustable head angle; Syncros Cable
Integration System; Bosch Smart System / UDH Interface /
12x148mm with 55mm Chainline; Bosch PowerMore Ready

SURTERS SPAM AVS Devker Part Controller

SULTERS SPAM AVS Devker Part Controller

FRAME Alloy Frame; Integrated Suspension Technology; Virtual 4 Link kinematic / Adjustable head angle; Syncros Cable Integration System; Bosch Smart System / UDH Interface / 12x148mm with 55mm Chainline; Bosch PowerMore Ready

TRAVELFront: 170mm / Rear: 150mm
FORK RockShox Domain R Air / E-Bike / Reb Adj. / QR Axle
15x110mm axle; 44mm offset / tapered steerer / 170mm travel CHAINGUIDE e*thirteen / e*spec Slider CHAINRING FSA 12Speed 34T chainring

Tubeless ready, 120TPI Foldable Bead

HANDLEBAR STEM Syncros AM 2.0; Syncros Cable Integration System;

4º rise / 6061 Alloy / 31.8mm / 1 1/8º

SEATPOST Syncros Duncan Dropper Post 2.5 / 31.6mm; S size 125mm /

M size 150mm / L size 170mm / XL size 200mm

SEAT Syncros Tofino-E 2.5 Regular

HUB (REAR) Formula ECT-148M / Boost 148x12mr

HEADSET Syncros - Acros Angle adjust & Cable Routing HS System / +-0.6° head angle adjustment; ZS56/28.6 – ZS56/40 MTB HUB (FRONT) Formula CL-811 / 15x110mm

SPOKES Stainless Black

SCOTT / PATRON eRIDE / TECH AND FACTS REPORT SCOTT / PATRON eRIDE / TECH AND FACTS REPORT 23 | 9 9 | 22



TECH AND FACTS REPORT

SCOTT ADDICT RC
© SCOTT SPORTS 2024

CONTACTO:

RODRIGO NOGUEIRA (RESP. COMERCIAL & MARKETING)

RODRIGO.NOGUEIRA@JASMA.PT

+351 212 268 838

